

# DAMARK

# MAXI - PAK

## Economy Sealer/Tunnel Combo System



These ruggedly built, economically priced shrink packaging systems are available in three levels of automation. Each level features quality, brand name components and craftsmanship, resulting in shrink packaging systems designed and built to provide years of reliable service.

MP series L-Sealers offer a large 14" x 18" seal area with low voltage impulse sealing system and solid-state temperature control. Easy load, adjustable film cradle and adjustable product loading table are standard. MP-2 and MP-3 L-Sealers include heavy-duty formed steel legs. MP-3 models feature a powered product discharge conveyor.



**Maxi-Pak Model MP-1:**



**Maxi-Pak Model MP-3:**

**MP-1 MANUAL TABLETOP SYSTEM:**

- (4 to 6 packages per minute)
- Large 14" x 18" sealing capacity
- Welded steel one-piece seal jaw
- Low voltage micro-processor impulse sealing system
- Electronic solid-state tunnel temperature control
- Easy load film cradle
- Tunnel chamber 24"L x 16"W x 7"H
- Variable speed silicone rubber belt conveyer
- Dual blower motor/heater system
- 3200 Watt heating capacity
- Unique 10-year warranty
- Top and side heat vents
- System works with all shrink films
- Welded schedule 16 sheet steel construction
- No tools required for changeover

**MP-2 SEMI-AUTOMATIC SYSTEM:**

- (8 to 10 packages per minute)
- Large 14" x 18" sealing capacity
- Welded steel one-piece seal jaw
- Low voltage micro-processor impulse sealing system
- Electronic solid-state tunnel temperature control
- Electro-magnetic seal jaw hold down
- Roller perforator air venting device
- Easy load film cradle
- Adjustable product loading tray
- Tunnel chamber 24"L x 16"W x 9"H
- Variable speed Teflon mesh belt conveyer
- Dual blower motor/heater system
- 3200 Watt heating capacity
- Unique 10-year heater warranty
- Top, side and bottom heat vents
- System works with all shrink films
- Welded schedule 16 sheet steel console stand construction
- No tools required for changeover


**MP-3 SEMI AUTOMATIC SYSTEM:**

- (10-12 packages per minute)
- Adds variable speed L-Sealer package discharge conveyor to MP-2 features

**Technical Specifications:**

	MP - 1	MP - 2 & 3
Electrical	220V/1PH/15A	220V/1PH/16A
Film Width	18" maximum	18" maximum
Unit dimensions	76"Lx30"Wx22"H	79"Lx30"Wx52"H
Shipping dimensions	83"Lx32"Wx30"H	83"Lx32"Wx56"H
Shipping weight	250 lbs	300 lbs
F.O.B.	Toronto, Canada	

Packaging speed varies with package size and film used

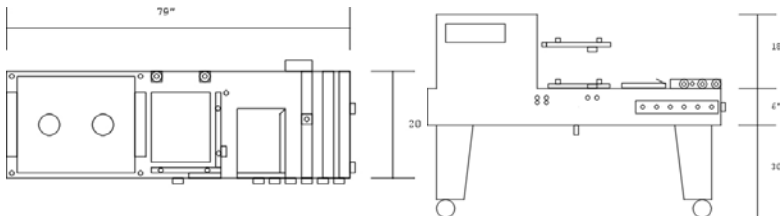

**DAMARK PACKAGING INC**  
 1200 Tapscott Road  
 Scarborough, Ontario  
 Canada M1X 1M5  
 Tel: (416) 609-8011  
 Fax: (416) 609-8008  
 www.damarkpackaging.com

**DAMARK PACKAGING SYSTEMS INC.**  
 P.O. Box 560901  
 Lewisville, TX  
 USA 75056-0901  
 Tel: (972) 625-8311  
 Fax: (972) 370-9113

**DISTRIBUTED BY:**

